



NASA Fundamental Aeronautics Program
SUP4.0 Cruise Efficiency - Airframe: Milestone Summary

MS S4.03.002 – Adjoint-Based Design for Configuration Shaping

Marian Nemec

ELORET Corp
NASA Ames Research Center
Moffett Field, CA 94035

Michael J. Aftosmis

NASA Advanced Supercomputing Division
NASA Ames Research Center
Moffett Field, CA 94035

30 September, 2009


MS S4.03.002 - Adjoint-Based Design for Configuration Shaping



Goal: Drive vehicle shape by prescribing quieter near-field signals

Approach:

- **Use adjoint method** to determine objective function gradients with quasi-newton (BFGS) optimizer
- **Inverse design:** Determine shape to produce a prescribed near-field signal
- **Cart3D:** Robust, scalable inviscid flow-simulations & discrete-adjoint using fully-automated Cartesian meshing with cut-cell boundaries
- **Parametric CAD-based** design framework using XML dataflow for shape sensitivities and control of CAD parameters
- **CAD-in/CAD-out:** Result of design is updated parametric CAD model with feature-tree intact

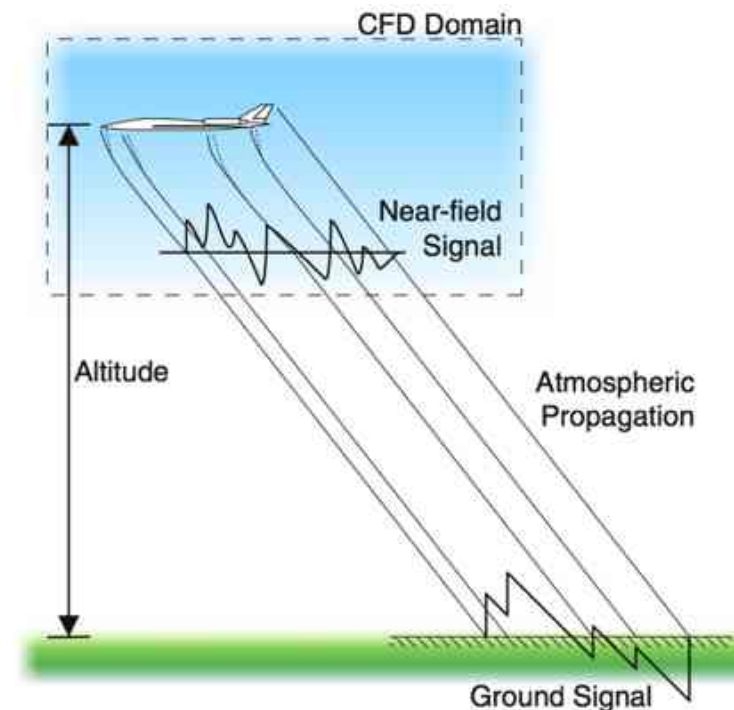


MS S4.03.002 - Adjoint-Based Design for Configuration Shaping



Exit Criterion: Demonstrate adjoint-based design for sonic boom mitigation through design optimization of a configuration completed in two weeks

- **Baseline configuration**
provided by Aeronautics Systems Analysis Branch (LaRC)
- **CAD-Model:** Construct parametric solid assembly in Pro/ENGINEER. Parameters in CAD parts become design variables for optimization
- **Gradient Computation:** Requires solution of an adjoint equation for the inverse design objective function and the evaluation of the following sensitivities via the chain-rule:
 - Sensitivity of surface triangulation to changes in CAD-parameters
 - Sensitivity of mesh to changes in surface triangulation
 - Sensitivity of near-field signal to changes in vehicle shape and mesh


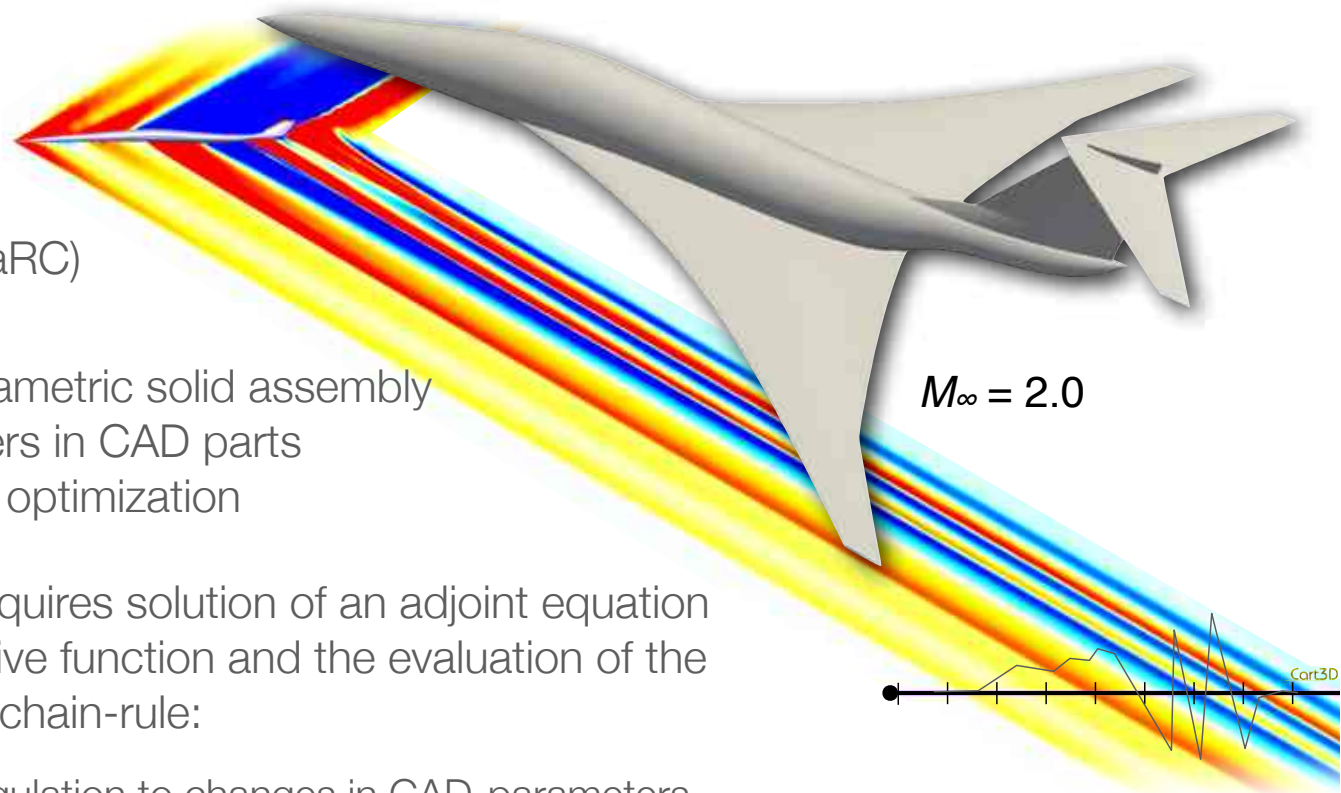


MS S4.03.002 - Adjoint-Based Design for Configuration Shaping



Optimization Goals:



- Inverse design to pre-specified target-signal measured two body-lengths away from the vehicle ($h/L = 2$)
- Smooth forebody ramp compression
- Decrease amplitude of rise at main wing
- Tailor aft-signal to reduce peaks
- Produce optimized CAD assembly with full feature tree intact
- Focus is on matching specified target near-field signal (no propagation to ground yet)

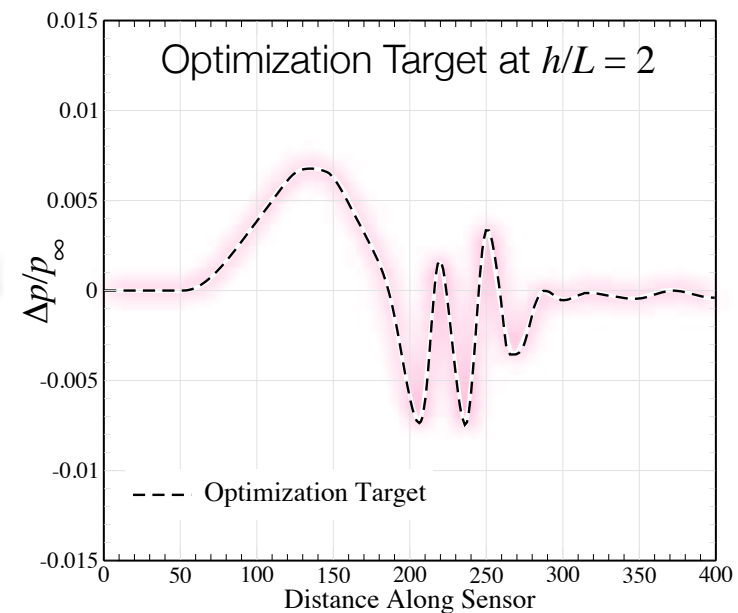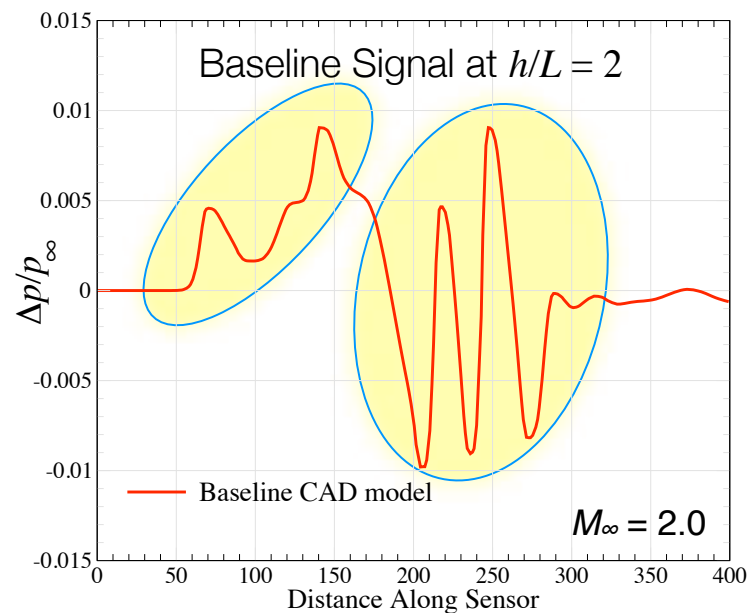


MS S4.03.002 - Adjoint-Based Design for Configuration Shaping



Shape Parameters in CAD-model:

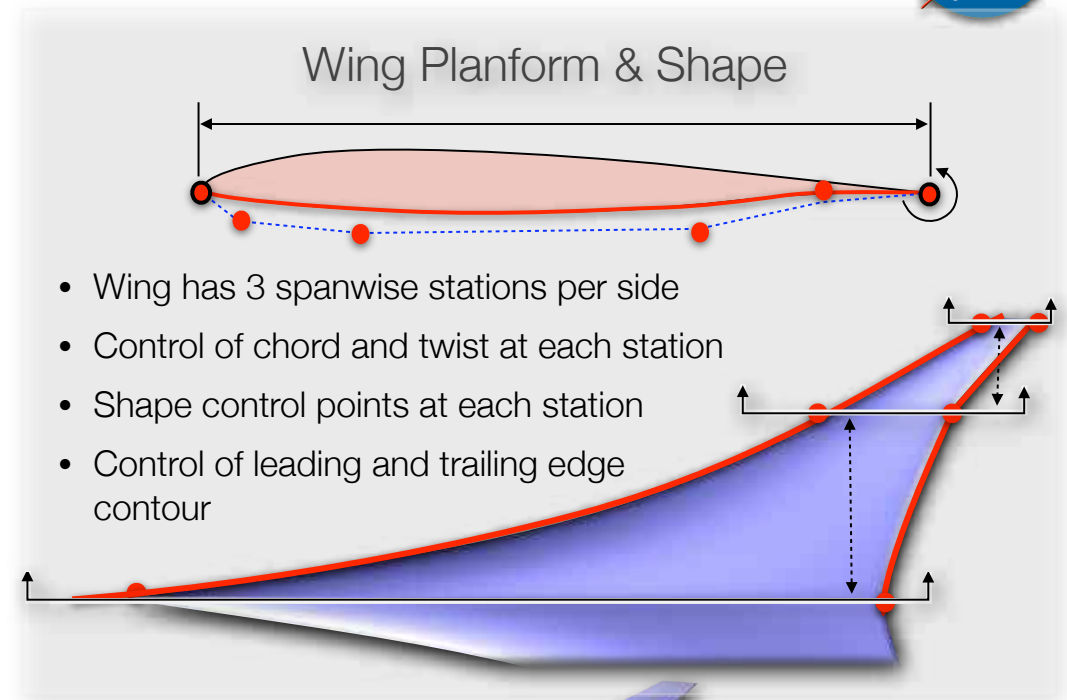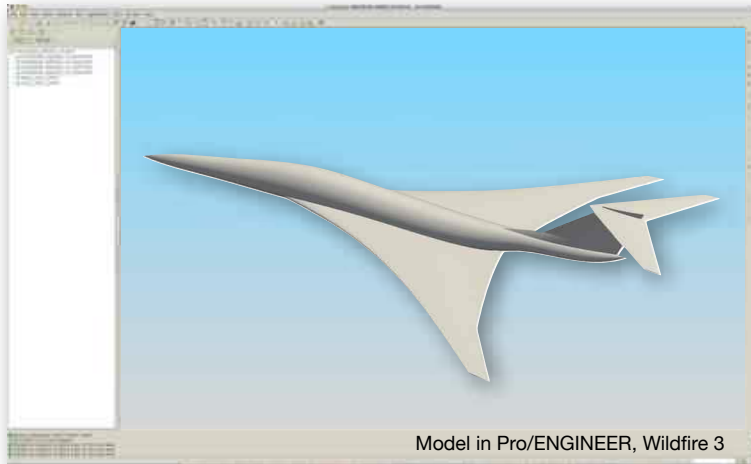

Fuselage and Empennage

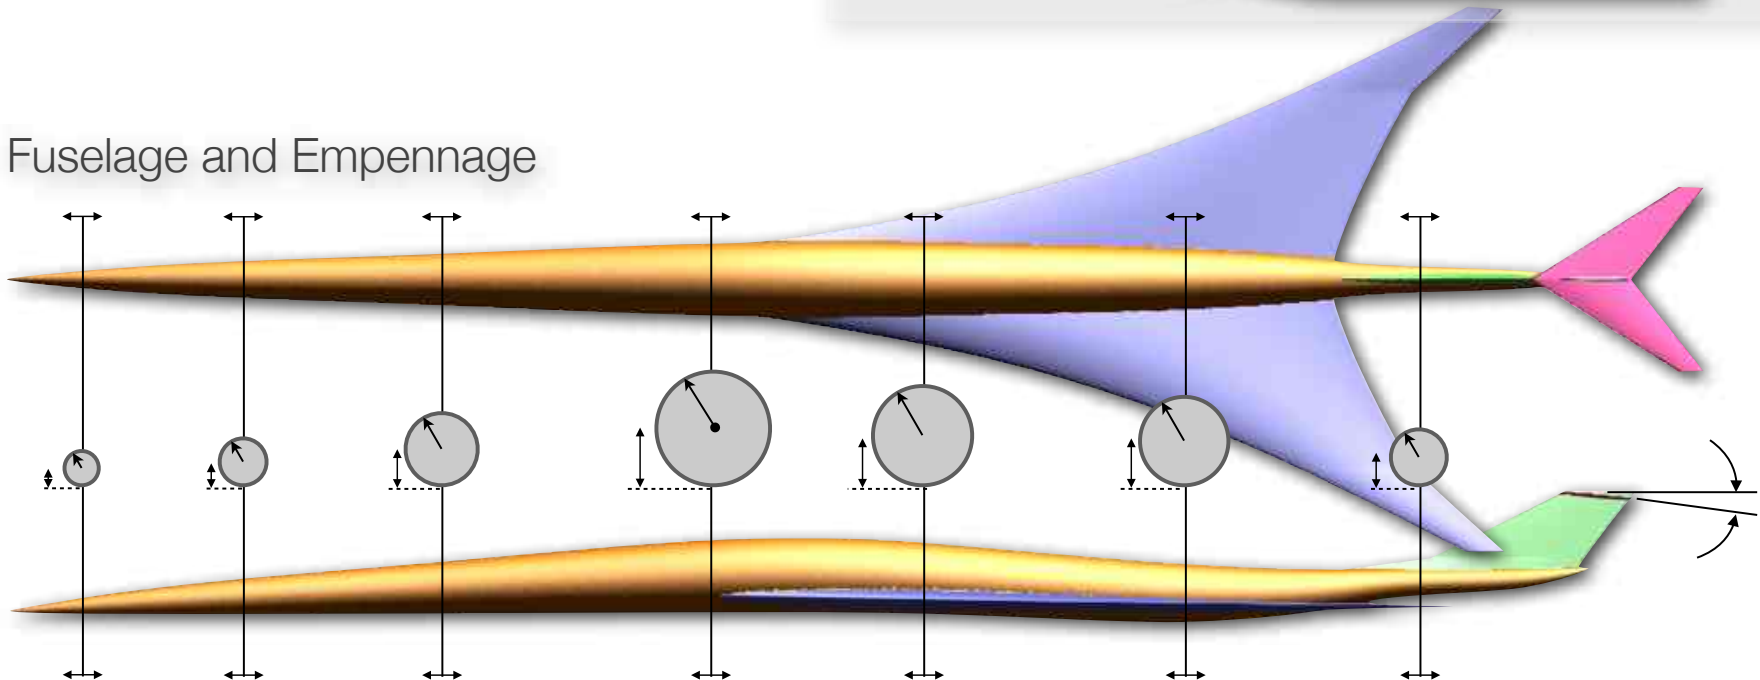


MS S4.03.002 - Adjoint-Based Design for Configuration Shaping




Design Variables Used

- CAD model controlled by ~100 independent parameters
- Selected 18 of the CAD-parameters to be Design Variables (DVs) for this particular inverse design case
 - **Fuselage Shape:** (9 DVs) radii and location of circular fuselage cross-sections
 - **Main Wing:** 4 airfoil shape parameters at 2 wing stations on lower surface
- **Horizontal Tail:** Angle of incidence, θ_{H-tail}

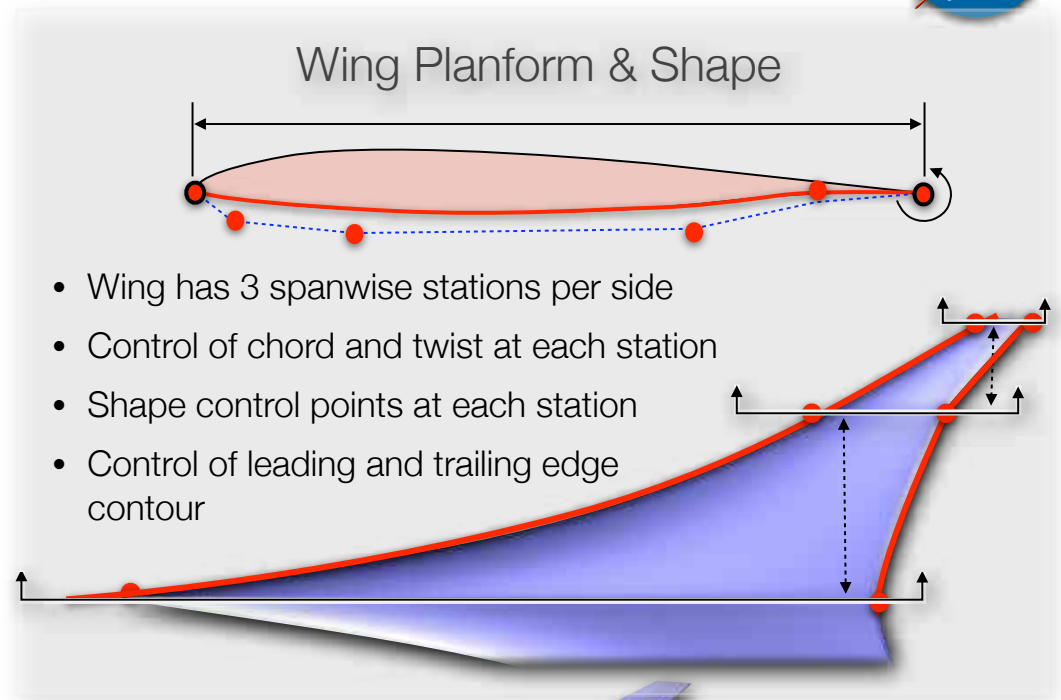

Fuselage and Empennage

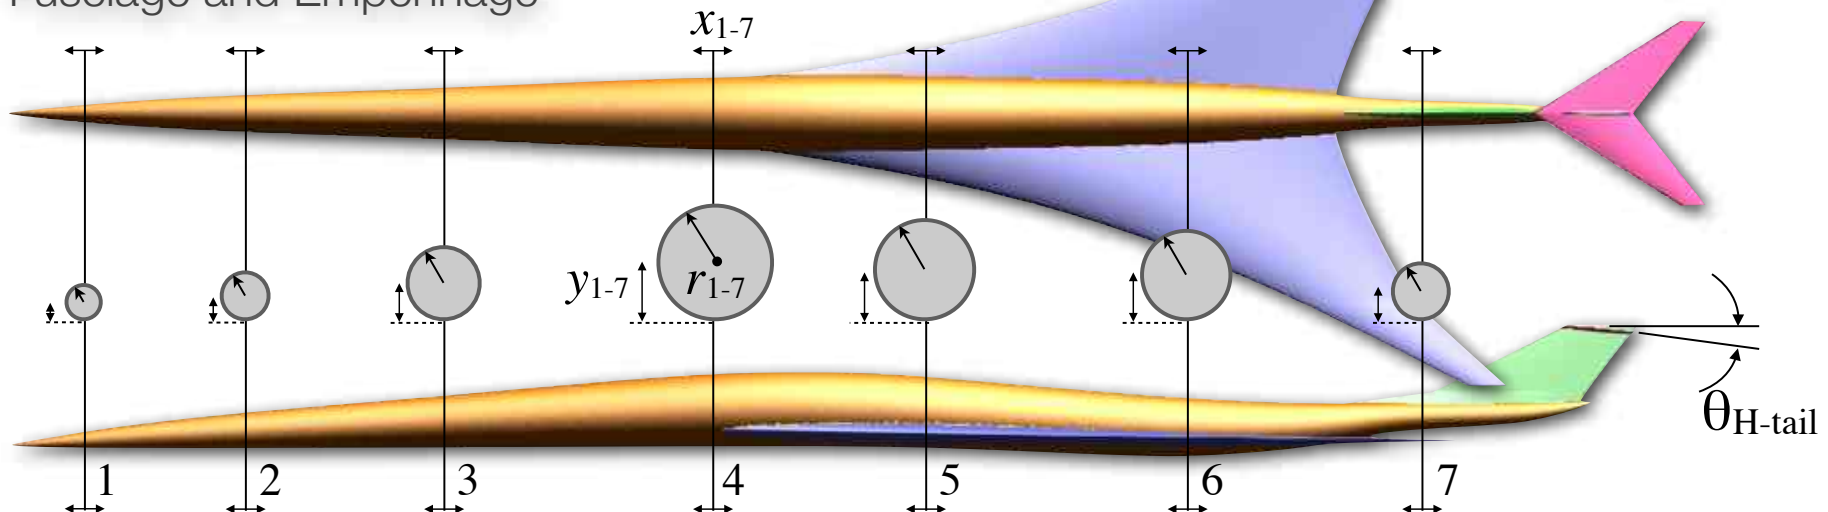


MS S4.03.002 - Adjoint-Based Design for Configuration Shaping







Optimization:


- Goal is to shape body using target pressure signal specified at $h/L = 2$
 - Objective function: Minimize $J = \int (P - P_{\text{target}})^2 dS$ at $h/L = 2$
- 18 Design variables
- Gradient-based optimizer used 19 search directions and a total of 28 objective function evaluations before flattening out
- Outcome is optimized CAD assembly with full feature-tree intact

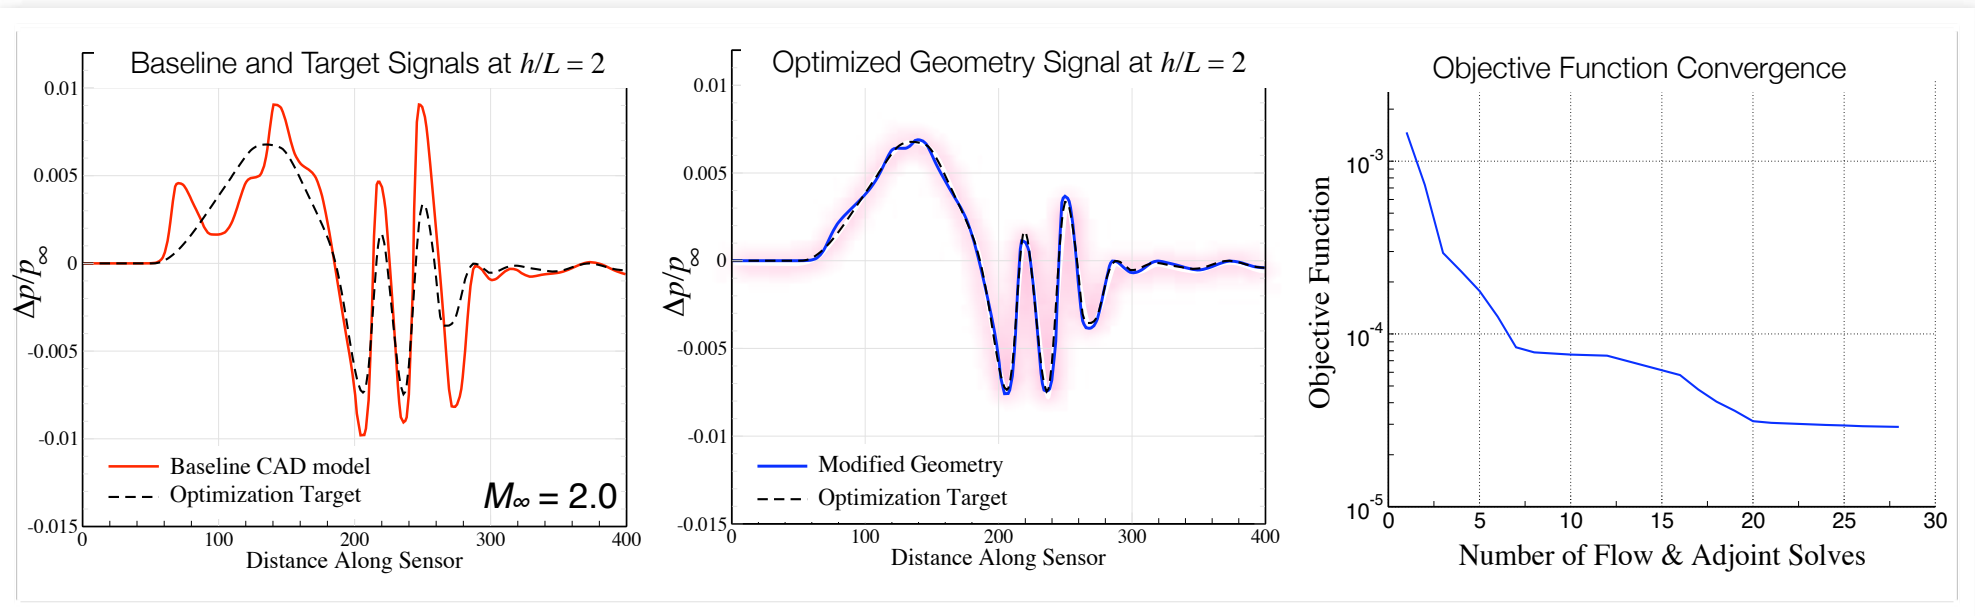


MS S4.03.002 - Adjoint-Based Design for Configuration Shaping

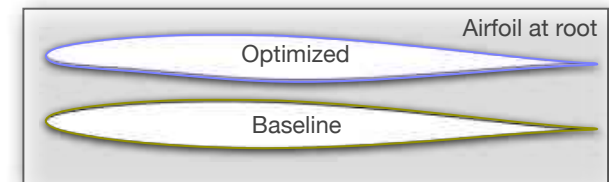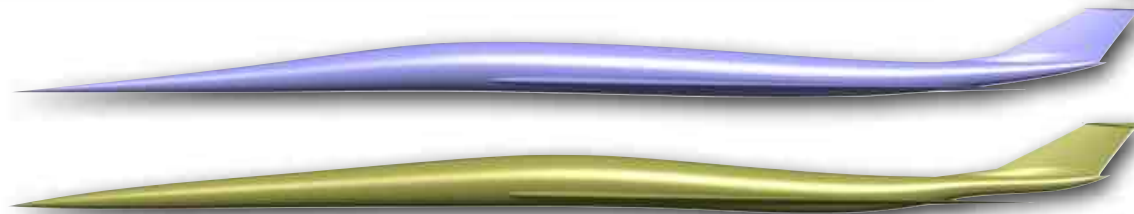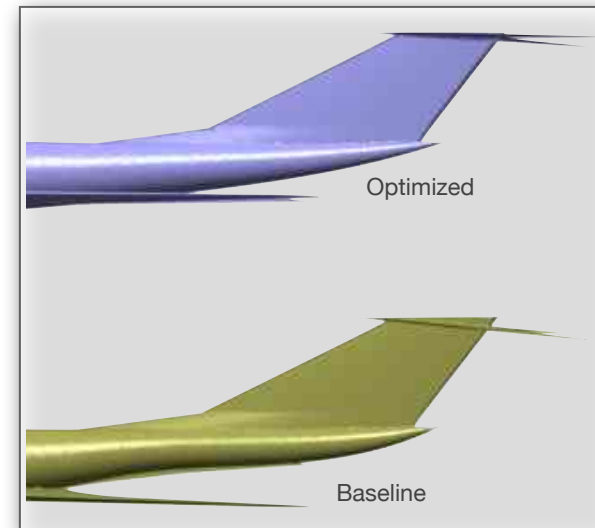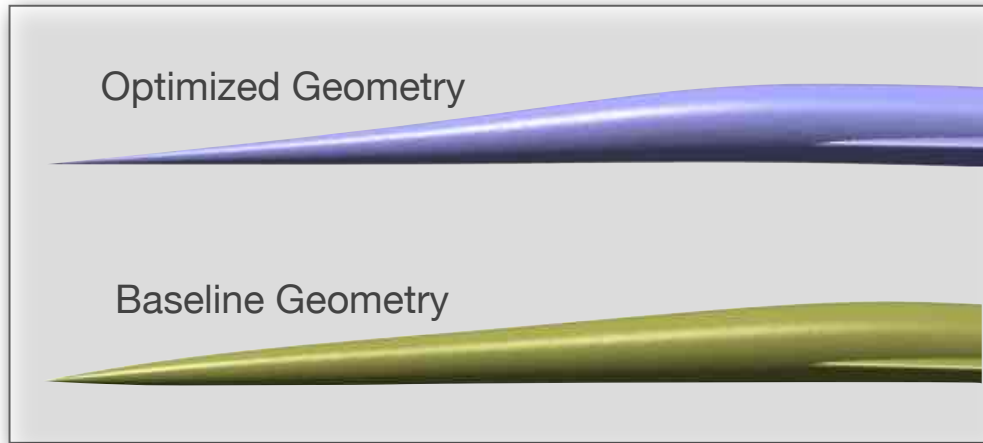

Baseline Geometry Signal at $h/L = 2$

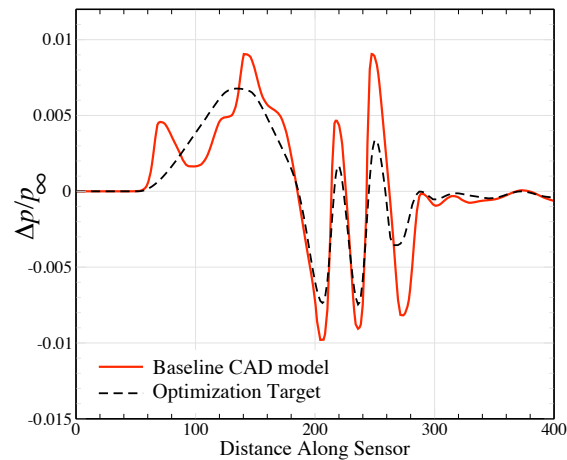


Optimized Geometry Signal at $h/L = 2$

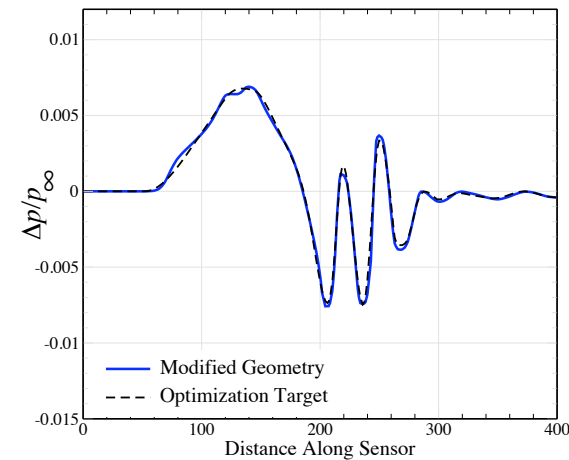


MS S4.03.002 - Adjoint-Based Design for Configuration Shaping




- Re-contouring of aft fuselage & underbelly
- Re-contouring of airfoil and wing-body juncture at leading and trailing edges
- Topology change at aft wing-body juncture

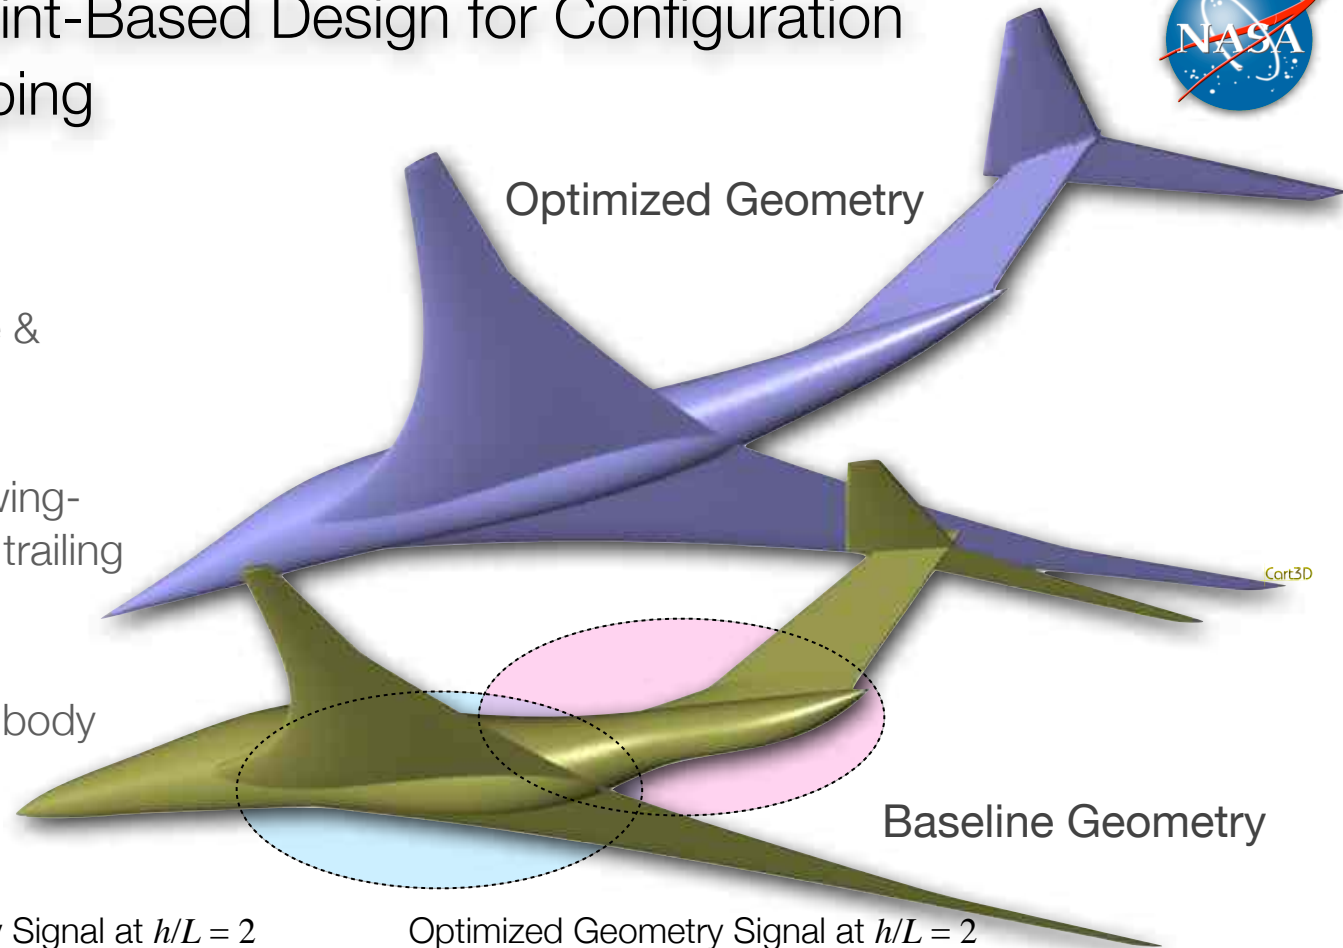

Baseline Geometry Signal at $h/L = 2$

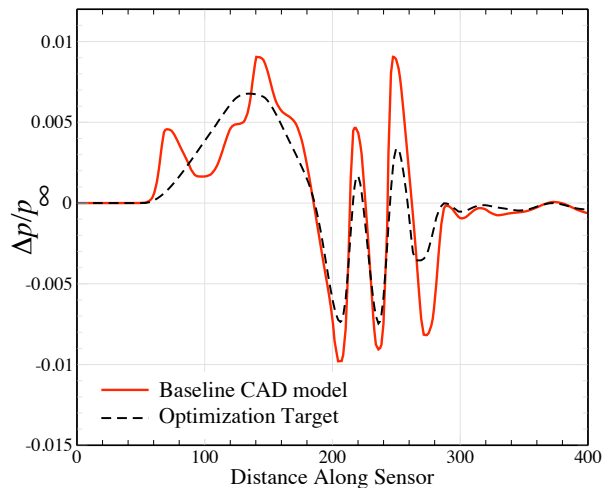


Optimized Geometry Signal at $h/L = 2$

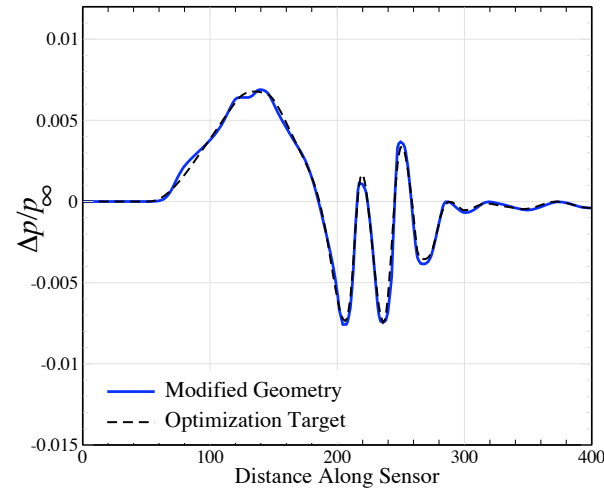

MS S4.03.002 - Adjoint-Based Design for Configuration Shaping




Baseline Geometry

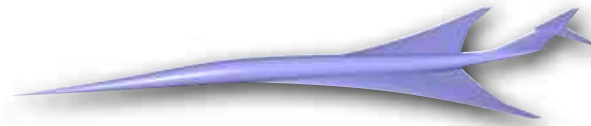



Optimized Geometry




$M_\infty = 2.0$ Isobars $M_\infty = 2.0$ Scaled Isobars



Baseline Geometry Signal at $h/L = 2$

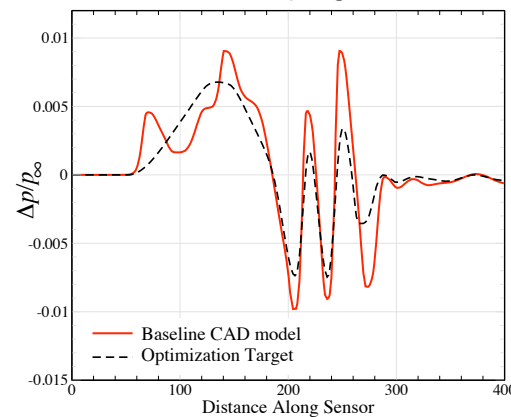

Optimized Geometry Signal at $h/L = 2$

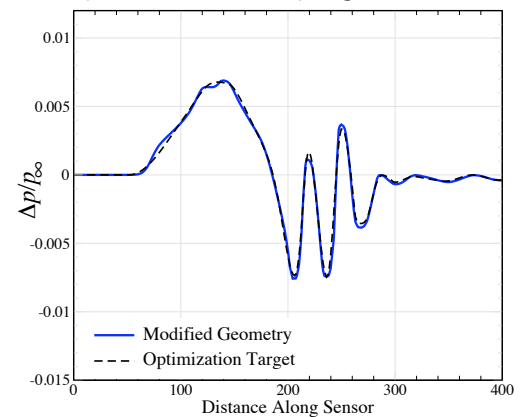


MS S4.03.002 - Adjoint-Based Design for Configuration Shaping



Timing and Performance:

- Optimization was carried out on 32 CPUs of Columbia and required ~1100 seconds of wall-clock-time per design iteration
- 18 Design Variables (nDV=18). Each iteration required
 - ✓ 1 flow & 1 adjoint solve
 - ✓ 3 x nDV re-generations of the geometry
 - ✓ 3 x nDV tessellations of the geometry
 - ✓ nDV surface sensitivities
 - ✓ nDV mesh sensitivities
 - ✓ Gradient formation and optimization step
- 5 CAPRI CAD-servers (running Pro/ENGINEER) provided geometry using “http://” protocol
- Design process used 19 search directions with 28 objective function & gradient evaluations
- ~20 x fewer resources than finite-difference gradients
- Total = 8.5 hrs wall-clock time

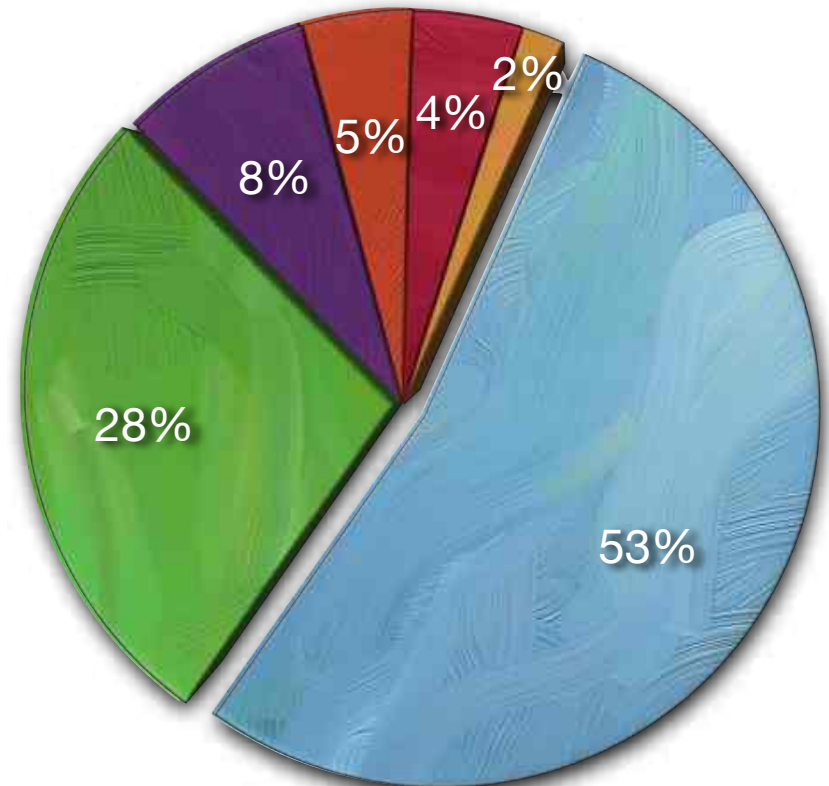

- Flow and Adjoint Solves
- Surface Sensitivities
- Regen & Triangulate New Design
- Mesh Generation and Coarsening
- Mesh Sensitivities
- Miscellaneous

Total = ~18 mins./design cycle

MS S4.03.002 - Adjoint-Based Design for Configuration Shaping



Summary

- Demonstrated adjoint-based design for sonic boom mitigation through design optimization of a complete configuration provided by LaRC in under 2 weeks (8.5 hrs on 32 Columbia CPUs)
- An inverse-design approach was used to shape a vehicle to match user-prescribed near-field pressure signature at a distance of 2 body-lengths away from vehicle
- Design approach uses adjoint-based gradients for mesh and flow field sensitivities in conjunction with a non-body-fitted Cartesian method for automation and efficiency
- First demonstration of accurate objective function gradients for remote functionals of full configurations using non-body-fitted methods
- Prototype Cart3D design framework has undergone extensive V&V and developers are working toward beta-release

MS S4.03.002 - Adjoint-Based Design for Configuration Shaping



Further Development

- Incorporate knowledge of signal after propagation to ground in near-field objective function
- Port Cart3D design framework to distributed memory platforms
- Incorporate adjoint-based adaptive meshing (Cart3D AERO module)
 - Extend AERO module to output mesh sensitivities
- Need to develop hooks for non-CAD modelers (Rage, Sculptor, VSP, in-hose modelers etc..)
- CAPRI CAD servers - $O(nDV^2)$ Regens and tessellation emphasize robustness & speed
 - Streamline surface tessellation and sensitivity calculations
 - Revisit CAD model construction for improved efficiency in regeneration & tessellation
 - Investigate analytic CAD sensitivities
- Examine alternative optimization strategies including those which trade design improvement with level of functional accuracy to accelerate convergence